


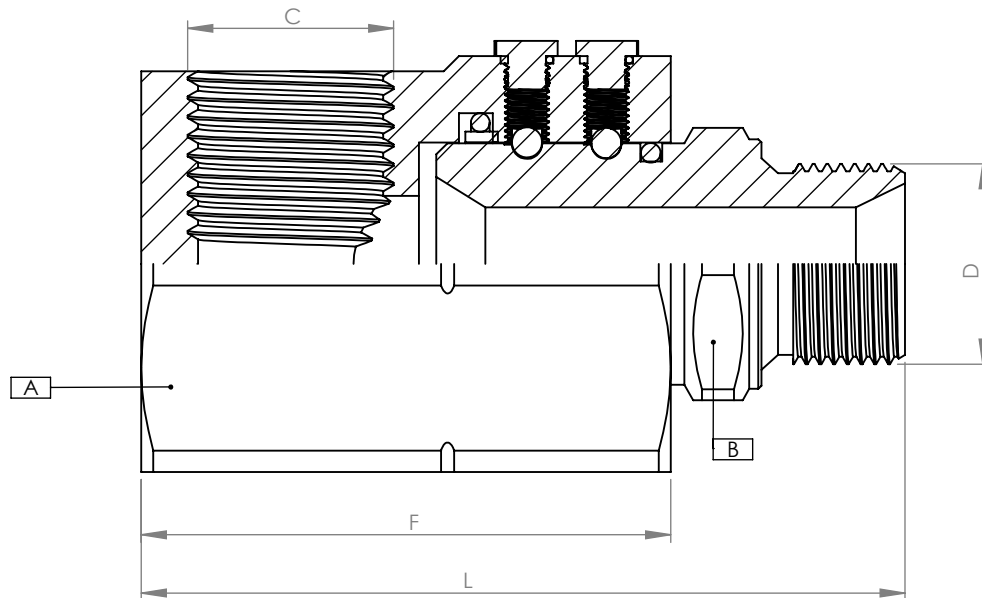

Size	Product Code	Hex A	Hex B	Port C	Port D	F		L		Weight		Max.Operating Pressure		Max.Fullow Suggested	
						mm	inch	mm	inch	kğ	lbs	MPa	psi	l/min	GPM
1/4"	DNB-D-14N	32	19	1/4"	1/4"	50	1.97	70	2.76	0.32	0.71	45	6527	44	11.62
3/8"	DNB-D-38N	36	24	3/8"	3/8"	54	2.13	77	3.03	0.43	0.95	45	6527	86	22.72
1/2"	DNB-D-12N	41	27	1/2"	1/2"	63	2.48	88	3.46	0.63	1.39	41	5947	187	49.41
3/4"	DNB-D-34N	55	36	3/4"	3/4"	70	2.76	102	4.02	1.26	2.78	36	5221	307	81.11
1"	DNB-D-1N	60	38	1"	1"	80	3.15	114	4.49	1.64	3.62	33	4786	516	136.33

Fluid:OIL ISO VG46
Temperature:40°C
Viscosity:41.4-50.6 mm²/s

- Spillage is an indicative value of the fluid loss during disconnection

Temperature Range:
Seals in NBR (Nitrile): From -20°C to +100°C (-4°F to +121°F)

Test Pressure:5.0 Bar
Test in Accordance:ISO 18869:2017