


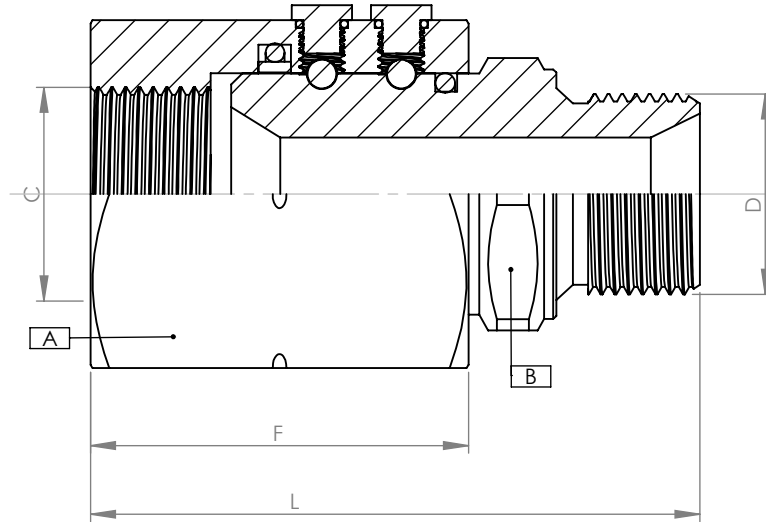

Size	Product Code	Hex A	Hex B	Port C	Port D	F		L		Weight		Max.Operating Pressure		Max.Fullow Suggested	
						mm	inch	mm	inch	kg	lbs	MPa	psi	l/min	GPM
1/4"	DNB-14N	30	19	1/4"	1/4"	42	1.65	62	2.44	0.21	0.46	45	6527	44	11.62
3/8"	DNB-38N	32	24	3/8"	3/8"	45	1.77	69	2.71	0.26	0.57	45	6527	86	22.72
1/2"	DNB-12N	36	27	1/2"	1/2"	48	1.89	72	2.83	0.35	0.77	41	5947	187	49.41
3/4"	DNB-34N	46	36	3/4"	3/4"	50	1.97	82	3.23	0.67	1.48	36	5221	307	81.11
1"	DNB-1N	50	38	1"	1"	57	2.24	90	3.54	0.83	1.83	33	4786	516	136.33

Fluid:OIL ISO VG46

Temperature:40°C

Viscosity:41.4-50.6 mm²/s

- Spillage is an indicative value of the fluid loss during disconnection

Temperature Range:

Seals in NBR (Nitrile): From -20°C to +100°C (-4°F to +121°F)

Test Pressure:5.0 Bar

Test in Accordance:ISO 18869:2017