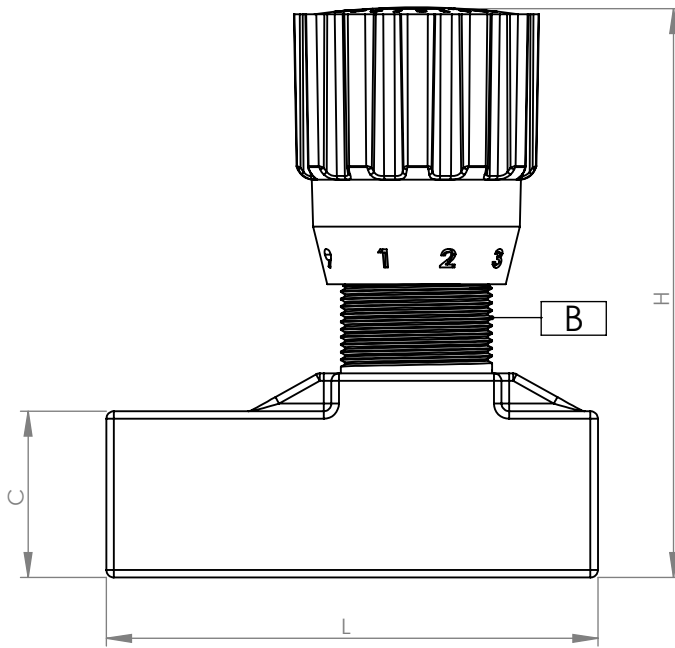


Product Code	Size	Working Pressure		DN	Max Flow		Port A	Port B	C		D		H		L		Weight	
		MPa	psi		l/min	GPM			mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs
OL-380FUV	3/8"	35	5076	10	30	7.9	3/8"	M20X1.5	22	0.87	23	0.91	78	3.07	65	2.56	0.26	0.57
OL-120FUV	1/2"	35	5076	13	50	13.2	1/2"	M25X1.5	27	1.06	27	1.06	92	3.62	85	3.35	0.47	1.04

Fluid: OIL ISO VG46

Temperature: 40 °C

Viscosity: 41.4-50.6 mm²/s

- Spillage is an indicative value of the fluid loss during disconnection


Temperature Range:

Seals in NBR (Nitrile): From -20 °C to +100 °C (-4 °F to +121 °F)

Upon request seals in VITON[®]: From -15 °C TO +180 °C (+5 °F to +356 °F)

Test Pressure: 5.0 Bar

Test in Accordance: ISO 18869:2017



Flow

