
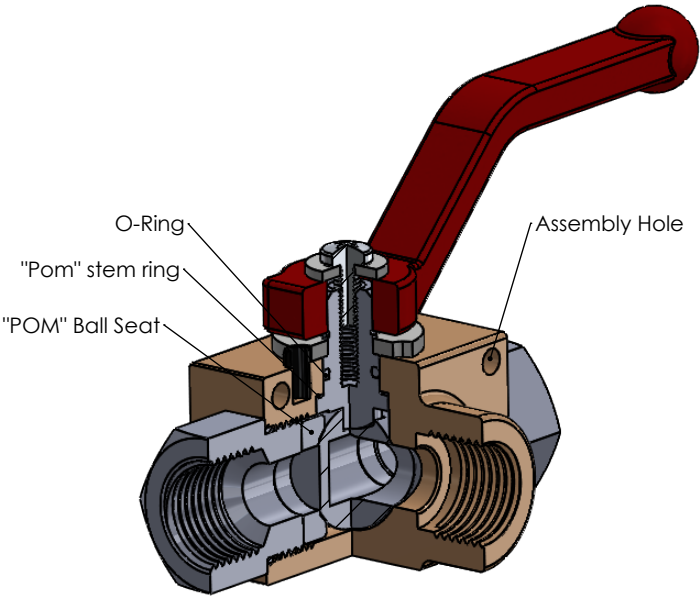



3 WAY HYDRAULIC BALL VALVES



TECHNICAL FEATURES AND OPTIONS

	Working Temperature -30°C / +110°C		Interchange DIN/ISO 228		Flow Rate Up to 690 l/min
	Operating Pressure Up to 500 Bar		Available Threads BSP-NPT		Material Carbon Stell/Aluminum
	Available Sizes From 1/4" to 1" 1/2		Sealing Description Nitrile NBR		

MAIN APPLICATIONS

				
Agriculture	Hydraulic Industry	Earth Moving	Vehicles	Chemical