


QCFA SERIES



TECHNICAL FEATURES AND OPTIONS

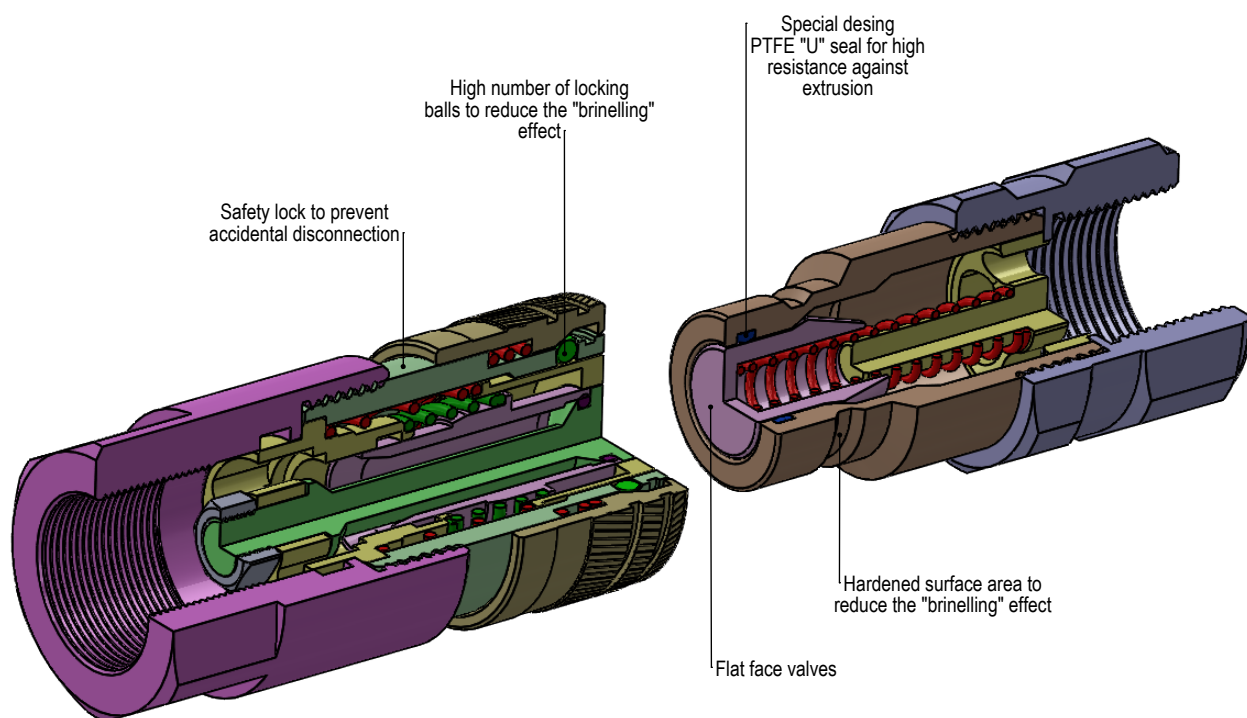

Working Temperature

-20°C / +100°C



Material

High Strenght Carbon Stell



Locking Mechanism

Locking Ball System+Safety Lock



Operating Pressure

Up to 450 Bar



Interchange

ISO 16028



Sealing Description

Nitrile NBR



Available Sizes

From 3/8" to 1"



Available Threads

BSP-NPT



Flow Rate

Up to 205 l/min

MAIN APPLICATIONS



Agriculture



Industry



Oil&Gas



Hydraulic Equipment



Earth Moving



Vehicles