


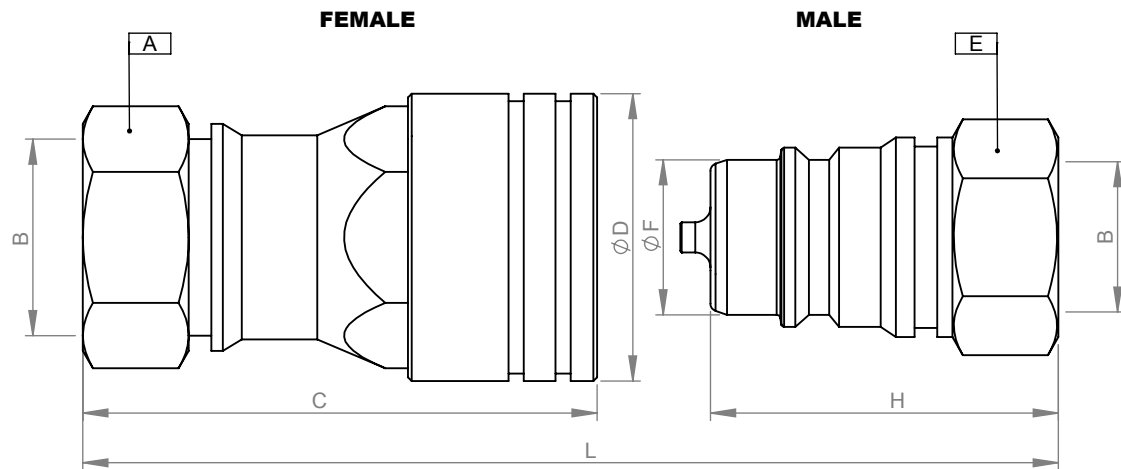

Size	Product Code	Product Name	ISO DN	HEX			Port B	Diameter			Lenght			Weight		Work Pressure	
				mm	inch			mm	inch		mm	inch		kğ	lbs	MPa	psi
3/8"	QC-S102	Coupled	10				3/8"				L	80.5	3.17	0.26	0.57	33	4786
	QC-S102-A	Female		A	27	1.06		D	35	1.37	C	60.5	2.38	0.20	0.44	33	4786
	QC-S102-B	Male		E	22	0.87		F	18.70	0.73	H	40	1.57	0.06	0.13	33	4786
1/2"	QC-S103	Coupled	12.5				1/2"				L	93	3.66	0.37	0.81	32	4641
	QC-S103-A	Female		A	30	1.18		D	38	1.49	C	68.50	2.69	0.28	0.61	32	4641
	QC-S103-B	Male		E	27	1.06		F	20.50	0.80	H	46	1.81	0.09	0.20	32	4641
3/4"	QC-S104	Coupled	20				3/4"				L	111	4.37	0.68	1.50	28	4061
	QC-S104-A	Female		A	36	1.41		D	48	1.89	C	83	3.26	0.48	1.05	28	4061
	QC-S104-B	Male		E	38	1.49		F	28.95	1.14	H	55	2.16	0.20	0.45	28	4061
1"	QC-S105	Coupled	25				1"				L	131	5.15	1.06	2.33	25	3626
	QC-S105-A	Female		A	46	1.81		D	55	2.16	C	98	3.85	0.76	1.67	25	3626
	QC-S105-B	Male		E	41	1.61		F	34.20	1.34	H	66	2.59	0.30	0.66	25	3626

Fluid:OIL ISO VG46

Temperature:40°C

Viscosity:41.4-50.6 mm²/s

- Spillage is an indicative value of the fluid loss during disconnection

Test Pressure:5.0 Bar