


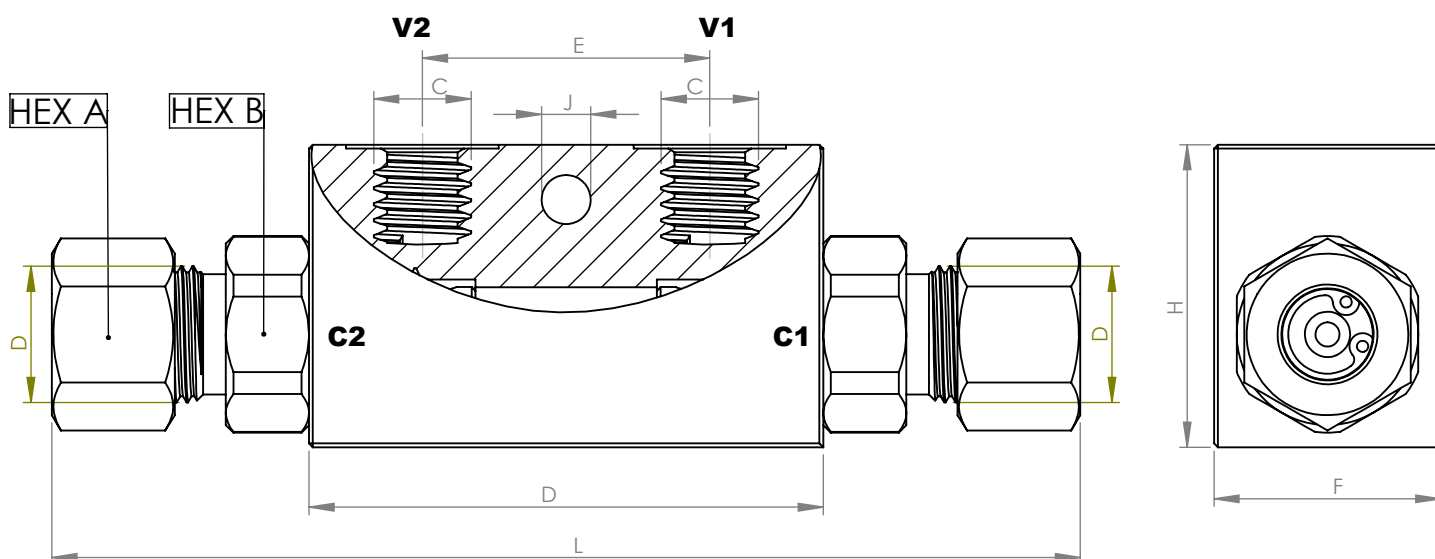

Size	Product Code	Hex A	Hex B	Port C	Port D	D		E		F		H		L		J	
						mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
3/8"	TLV-S304	22	24	3/8"	M21X1.5	68	2.68	38	1.50	30	1.18	40	1.57	135	5.31	7	0.28

Size	Max. Pressure		Cracking Pressure	Weight		Weight		Max. Flow Suggested			
				Steel		Aluminum		V1---C1 / V2---C2		C1---V1 / C2---V2	
	MPa	psi		kġ	lbs	kġ	lbs	l/min	GPM	l/min	GPM
3/8"	38	5511	3	0.65	1.43	0.39	0.86	33	8.72	45	11.89

Fluid: OIL ISO VG46

Temperature: 40°C

Viscosity: 41.4-50.6 mm²/s

- Spillage is an indicative value of the fluid loss during disconnection

Test Pressure: 5.0 Bar

Test in Accordance: ISO 18869:2017

Temperature Range:

Seals in NBR (Nitrile): From -20°C to +100°C (-4°F to +121°F)

Upon request seals in VITON[®]: From -15°C TO +180°C (+5°F to +356°F)